


## A touch of class

Supra stands for better quality and even more care put into detail, for a system bound to last in time. This is why its shell, a galvanized steel porting structure, has been coated with a solid plastic shockproof armour, inspired by the automobile world.

LIFE makes the difference and introduces Supra: a “diva” on the scene of road barrier automation. Power and control dressed up with the same elegance and class of the most prestigious automobiles on the market.

## SUPRA

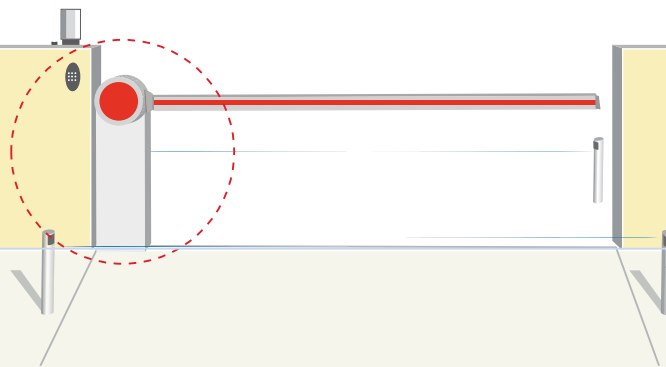

		SU4 24	SUPRA MB	SUPRA MB 230
Max length boom	M	5	5	4
Power supply	V	230V 50Hz	230V 50Hz	230V 50Hz
Motor supply	V	24V	24V	230V 50Hz
Power	W	150	150	150
Torque	Nm	150	150	150
Working temperature	°C Min/Max	-20 +70	-20 +70	-20 +70
Protection level	IP	55	55	55
Intermittence work cycle	%	80	80	40
Time for 90° cycle	s	2 ÷ 6	2 ÷ 6	5