

ALT

ELECTROMECHANICAL BARRIER WITH DOUBLE BUILT-IN FLASHING LIGHT FOR BAR FROM 3 TO 9 m, 24 Vdc

For intensive use, for private and public solutions

Anti-UV rays epoxy power coating

Integrated receiver

Energy saving mode

Robust gears and levers for reliable functioning over time

Encoder for obstacle detection and immediate run inversion

Double built-in flashing light, two-coloured green/red

Double spring (6 m model) to counter balance movement and make it more fluent

Universal box: bar can be installed both right or left




Possibility to set different speed in opening and closing motion

With 24 Vdc control unit CT102 24, (page 146 for technical details)

Maximum speed:
 - up to 1 second for ALT324KF
 - up to 3,5 seconds for ALT424K
 - up to 6 seconds for ALT624K


FASTLINE

MODELS

CODE	DESCRIPTION	PCS PALLET
 ALT324KF	Barrier body, 24 Vdc motor, with control unit in box, with integrated receiver, with encoder, double built-in led flashing light. For 3 m bar, connection for bars included (1 pc)	5
 ALT424K	Barrier body, 24 Vdc motor, with control unit in box, with integrated receiver, with encoder, double built-in led flashing light. For 4 m bar, connection for bars included (1 pc)	8
 ALT624K	Barrier body, 24 Vdc motor, with control unit in box, with integrated receiver, with encoder, double built-in led flashing light. For 6 m bar, connection for bars included (1 pc)	5




Double Led flashing light

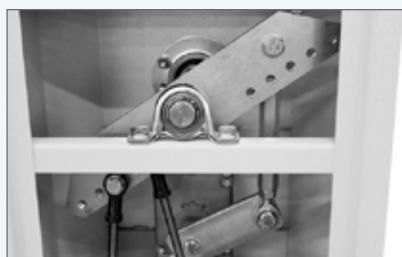

Metallic gear + shock resistant motor (ALT624K)



CT102 24 control unit

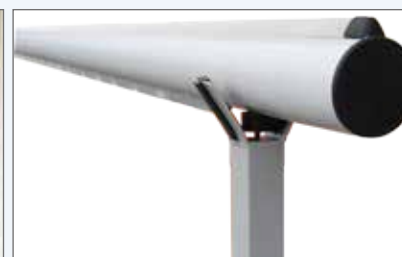



New bar of 5 m for ALT4K

		ALT324KF	ALT424K	ALT624K
MECHANICAL DATA				
torque	Nm	40	200	305
working cycle	%	50	80	80
opening time at 90° **	sec	1	3,5	6/*12
ELECTRICAL DATA				
control board		CT102 24F	CT102 24	CT102 24
power	Vac	230	230	230
consumption	A	1,6	1,3	1,3
absorbed power	W	330	300	300
integrated lights		yes	yes	yes
GENERIC DATA				
protection degree	IP	54	54	54
dimensions (L - D - H)	mm	450 - 280 - 1188	360 - 220 - 1110	450 - 280 - 1188
weight	kg	62	47	67
working temperature	°C	-20 + 55	-20 + 55	-20 + 55
maximum bar length	m	3	4	6 *(8 mt)

* with 8 m bar
** without accessories



DIMENSIONS

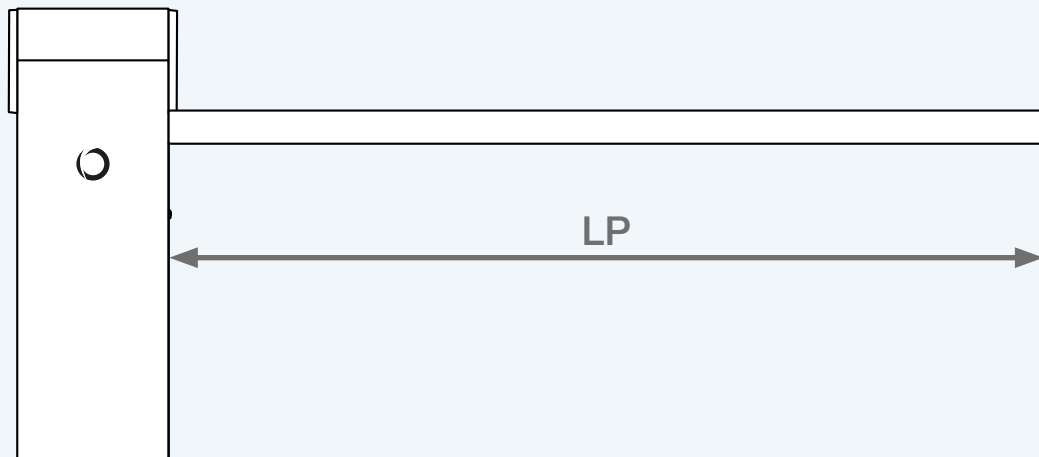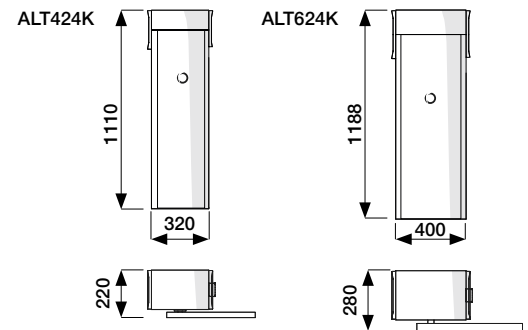

BAR	CLEAR OPENING (LP)
3 m (AST3F)	2740 mm
4 m (ASTL4)	3780 mm
4 m (ASTL4J)	3780 mm
5 m (ASTL5)	4780 mm
6 m (ASTL6)	5640 mm
6 m (ASTL6J)	5640 mm
8 m (ASTL8)	8040 mm
9 m (AST8)	7956 mm