

The first step in the design process is to define the problem. This involves identifying the user's needs and the constraints of the design. Once the problem is defined, the next step is to generate ideas. This can be done through brainstorming, sketching, or other creative techniques. The third step is to evaluate the ideas. This involves comparing the ideas against the user's needs and the design constraints. The final step is to develop a solution. This involves creating a detailed design that meets the user's needs and the design constraints.



MEC 800 3000 GATE OPENER

Technical specifications

Power supply: 230V/50Hz
Power consumption: 120W
Max. force: 3000N
Max. opening speed: 8.5mm/s
Max. opening time: 12s
Max. cable length: 100m
Max. gate weight: 100kg
Max. gate height: 2.5m
Max. gate width: 4.5m
Max. gate material: aluminum, steel
Max. gate thickness: 40mm
Max. gate height from ground: 2.5m
Max. gate weight from ground: 100kg


Installation: The gate opener is installed on a wall or ceiling. The gate is connected to the opener by a cable. The cable is made of galvanized steel and has a length of 100m. The gate is made of aluminum or steel and has a weight of 100kg. The gate height is 2.5m and the width is 4.5m. The gate thickness is 40mm and the height from the ground is 2.5m. The gate weight from the ground is 100kg.

Accessories: The gate opener is supplied with a remote control and a receiver. The remote control is made of plastic and has a length of 10cm. The receiver is made of plastic and has a length of 5cm. The remote control and receiver are used to operate the gate opener. The gate opener is also supplied with a cable and a bracket. The cable is made of galvanized steel and has a length of 100m. The bracket is made of plastic and has a length of 5cm. The cable and bracket are used to connect the gate to the opener.

Warranty: The gate opener is covered by a 5-year warranty. The warranty covers all parts and labor. The warranty is void if the gate opener is not installed correctly or if it is used for a purpose other than that intended.



Accessories

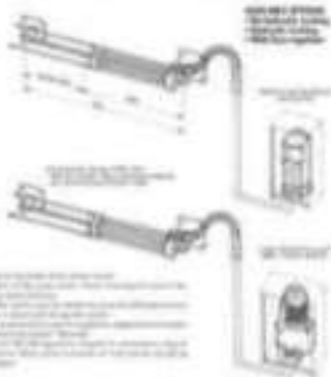

Remote control: The remote control is made of plastic and has a length of 10cm. It is used to operate the gate opener. The remote control has a battery life of 10 years. The remote control is waterproof and can be used in all weather conditions. The remote control is also supplied with a receiver. The receiver is made of plastic and has a length of 5cm. The receiver is used to receive the signal from the remote control. The receiver is also supplied with a cable and a bracket. The cable is made of galvanized steel and has a length of 100m. The bracket is made of plastic and has a length of 5cm. The cable and bracket are used to connect the remote control to the opener.

CE **CONFORME A LA**
REGLA 2014/53/UE
PER IL RILASCIO
DELLA MARCA

MEC 800 3000
 GATE OPENER

